

NHW-15

HOT WATER MACHINE



DUAL VOLTAGE: Convertible for 110 or 220 voltage applications for site flexibility and inventory management.

TANK CAPACITY: 1.5 gallon tank.

TVT PROGRAMMING TECHNOLOGY: Leading edge digital programming from Newco allows for easier set up and operational accuracy.

LARGE LCD DISPLAY: Quick referencing of system settings for efficient operator management.

SELF MONITORING: 6 Potential error modes and dual zone temperature readout indicate system status for convenience of operation and pre-service trouble shooting.

ADVANCED TEMPERATURE CONTROL: dual thermistors (top and bottom) ensure consistent temperature draw throughout the tank.

AUTOMATIC PRE-FILL: Fills on initial hook up for convenience of install. Element is activated only when water level has reached the top probe.

BOLD CAUTION DECAL: Bilingual "CAUTION VERY HOT WATER" decal reinforces operator safety and awareness.

DURABILITY: Stainless steel exterior and tank assembly.


STANDARD DRIP TRAY: Large capacity drip tray with stainless steel cover for durability and center logo for aesthetic appeal.



NHW-15
PN:104100

Text header

Dimensions

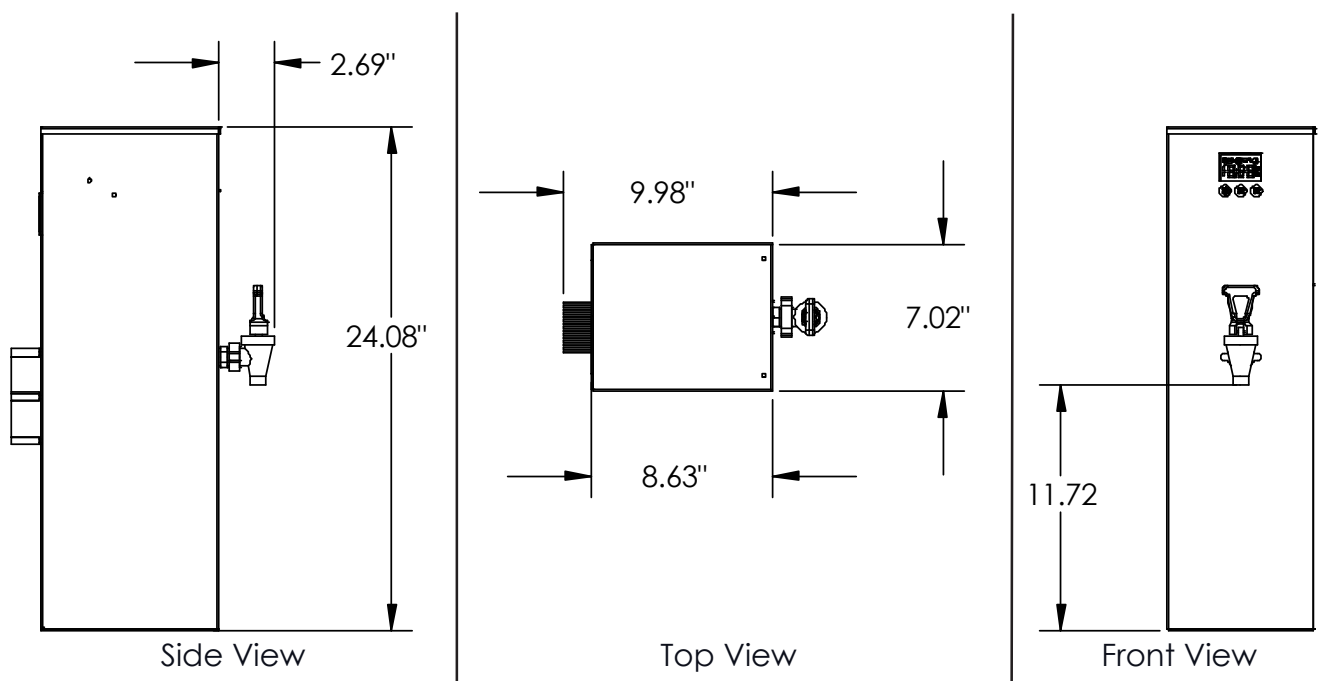

Additional Information

Part Number	Model	Height	Width	Depth	Volts	Watts	Amps	Weight
PN: 104100	NHW-15	23.5"	11.89"	17.75"	120 VOLTS	1450W	12A	35 LBS

Electrical: 120V models are 2 wires plus ground service rated 120V, single phase, 60Hz. 120/240 V models are 3 wires plus ground service rated 120/240 V, single phase, 60Hz

Plumbing: Water line should be 20-90 PSI and have a minimum flow rate of 1.5 GPM. Mechanical connection on brewer is 1/4" male flare connector.